


IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure the electricity connections conform to the National Electrical Code and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.


SAVE THESE INSTRUCTIONS!

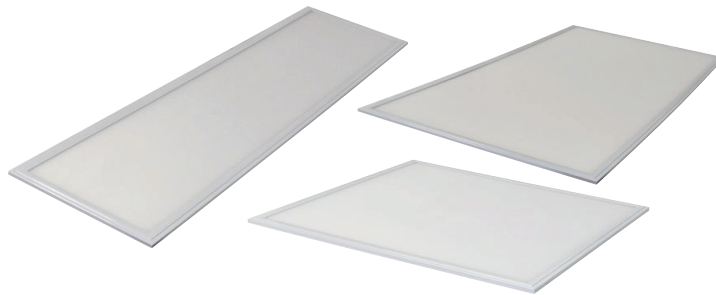

INSTALLATION INSTRUCTIONS

Suspended Installation

1. Drill (4 or 6) small holes in the ceiling surface depending size model.
2. Install (4 or 6) plastic anchors into holes and (4 or 6) cable locks to plastic anchors using metal screws. (not included)
3. Place LP lens face down on flat surface and remove junction box cover and set aside.
4. Knock out appropriate knock-outs on junction box.
5. Locate (4 or 6) earthquake clips on panel and pull tabs upright and twist out.
6. Run support cables through holes of clips as shown in image.

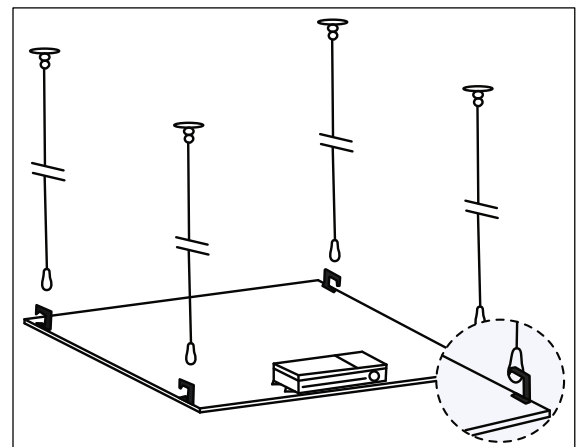

Wiring Connections

Electrical connections should be made inside driver housing.

- Remove screw and open cover.
- Connect the line fixture lead to the black supply lead.
- Connect the common fixture lead to the white supply lead
- Connect the ground lead from the service to the green grounding screw or to the ground lead coming from the housing.
- If dimming wires are not used, make sure they are capped.
- Close cover and secure with the screw.

This fixture auto adjust for voltages between 120VAC - 277VAC.

Wiring Diagram

Use appropriate wire diagram based on applicable model.

